



# ATT CL2940 Back Panel Disassembly

This guide will give the user instructions in how to remove the back panel of the phone.

Written By: Charles Messmore



## INTRODUCTION

To get to many components in the phone, one must remove the back panel. This guide will serve as a first step in replacing most of the components.

---



### TOOLS:

- [Metal Spudger Set](#) (1)
  - [Pro Tech Toolkit](#) (1)
-

## Step 1 — Back Panel



- Remove five 9.5 mm Phillips #1 screws from the back panel of the phone.


## Step 2




- Slide metal spudger into the crack around the Front Panel of the phone

⚠ Be careful not to break the clips holding the Back Panel to the Front Panel

## Step 3

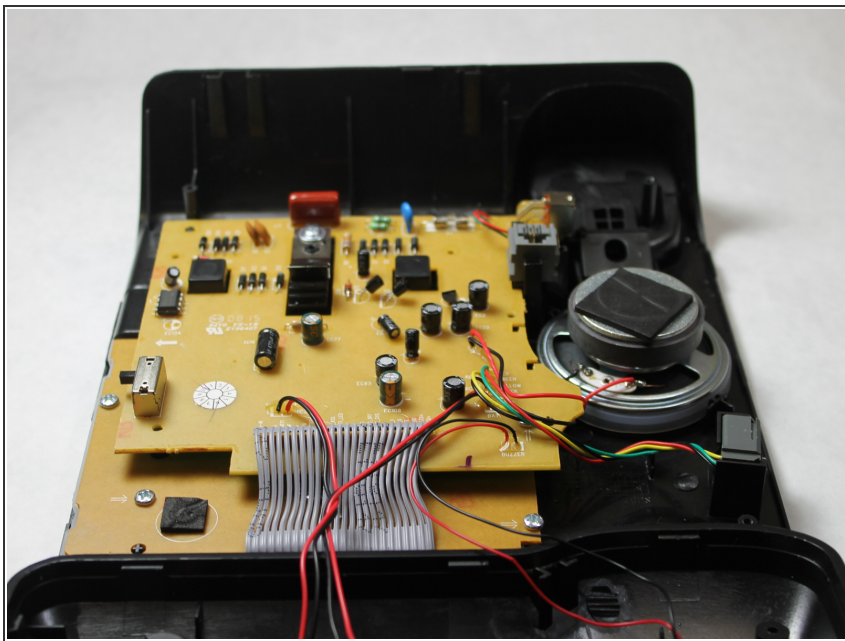

 When setting the back panel down, be careful to not rip any of the wires off of the internal components

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-15 02:38:54 AM.